

Professional Range

AIR VERSION

TEON Professional range in **Air** (air-water) version consists of natural monobloc air-water heat generators for the production of heating and domestic hot water (DHW), with the option of reversibility for summer operation in cooling mode. The **T60**, **T115** and **T250** models are single-stage, capable of delivering:

- High-temperature hot water (min 30°C - max 80°C);
- Chilled water at low temperature (min 5°C) - only in reversible models ('RT').

The compressors used are of the energy-efficient reciprocating type. They are developed and optimised for applications with R600a refrigerant, minimising power consumption, vibration and noise.

The heat exchangers are AISI 316 stainless steel plates, brazed welded, with countercurrent heat exchange and AISI 304 stainless steel connections. They are characterised by high thermal efficiency with simultaneous high turbulence and reduced risk of scale and deposit formation.

Inside the supporting structure with perimeter panelling are the main machine components: compressor, laminating valve, evaporator, condenser, economiser, measuring and control components, piping and various in-line components, machine edge.

The outdoor unit is constructed with a pre-painted aluminium and galvanised iron frame painted with corrosion-resistant epoxy powder. The fans that compose it are three-phase powered axial fans, equipped with thermal protection, lubricated for life, statically and dynamically balanced with brushless EC / energy-saving.




**WATER
BLAZE**[®]
TECHNOLOGY


TEON's WATER BLAZE technology introduces into the traditional thermodynamic cycle of heat pumps a forced sub-cooling, thanks to which more thermal power is recovered from the natural source to be transferred to the heating system and overall efficiency is maximised. This is achieved by splitting the iso-enthalpic curve into two distinct transformations, one at constant pressure and one at constant temperature, which take place in a recuperator and a lamination valve, respectively.

TECHNICAL FEATURES

PERFORMANCE	U.M.	T60			T115			T250		
HEATING (T Models)										
		A7/W35	A7/W50	A7/W80	A7/W35	A7/W50	A7/W80	A7/W35	A7/W50	A7/W80
Thermal Power	[kW]	46,2	40,9	28,6	85,2	73,6	50,7	170,5	147,2	101,4
Electric Power	[kW]	11,3	12,6	13,7	19	21,4	23,6	38	42,8	47,2
COP	[-]	4,07	3,24	2,09	4,48	3,44	2,15	4,48	3,44	2,15
Water flow on the plant side	[l/s]	2,21	1,96	0,68	4,07	3,52	1,21	8,15	7,03	2,42
Refrigerant charge (R600a)	[kg]	4			6,9			15		
COOLING (Rt Models)										
OPERATING CONDITIONS (UR 50%)										
		A35/W7			A35/W7			A35/W7		
Refrigeration Power	[kW]	56,3			104,9			209,9		
Electric Power	[kW]	10,7			18,4			36,9		
EER	[-]	5,27			5,69			5,69		
Water flow on the plant side	[l/s]	9,68			18,05			36,1		
Refrigerant charge (R600a)	[kg]	5			9			15		

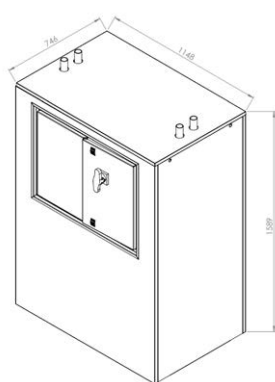

T60



T115



T250

NOTE: For **T60** and **T115**, the following clearances apply: front and rear 500 mm, side left and right 600 mm and top 500 mm. For **T250** the following clearances apply: front and rear 1000 mm, side left and right 800 mm and top 150 mm.

TECHNICAL DATA	U.M.	T60	T115	T250
PRINCIPAL UNIT				
Max nominal electric current	[A]	32,9	66,1	132,2
Sound pressure level 1 m (*) (w.o. Acoustic Insulation optional)	[dB(A)]	61	64	67
Sound pressure level 5 m (*) (w.o. Acoustic Insulation optional)	[dB(A)]	47	50	53
Sound pressure level 10 m (*) (w.o. Acoustic Insulation optional)	[dB(A)]	41	44	47
Water circuit load loss on condenser side	[kPa]	6,5	8,2	12,3
Power supply	[V/-/Hz]	400/3/50+N	400/3/50+N	400/3/50+N
Refrigerant type	[-]	R600a	R600a	R600a
Compressors type	[-]	Alternativo	Alternativo	Alternativo
Partialization (with partialization optional)	[-]	83 / 66	88 / 75	88 / 75 / 50 / 44 / 38
OUTDOOR UNIT				
Number of fans	[-]	3	4	2 x (4)
Water flow	[m3/s]	6,7	8	17
Max nominal electric current	[kW]	2,1	2,8	5,6
Sound pressure level 1 m (*)	[db(A)]	70	71	71
Sound pressure level 5 m (*)	[db(A)]	56	57	57
Sound pressure level 10 m (*)	[db(A)]	50	51	51
SIZES AND WEIGHTS				
PRINCIPAL UNIT				
Dimensions (L x P x H) (**)	[mm]	1.148 x 746 x 1.589	1.768 x 968 x 1.622	1.224 x 1.529 x 2.172
Empty weight	[kg]	660	990	1761
Operating weight	[kg]	700	1033	1868
Diameter evaporator side hydraulic connections	[Victaulic]	G 1" 1/4"	DN50	DN80
Diameter condenser side hydraulic connections	[Victaulic]	G 1" 1/4"	DN50	DN65
OUTDOOR UNIT				
Dimensions (L x P x H) (**)	[mm]	2.930 x 870 x 992	3.830 x 870 x 992	N. 2 x (3.830 x 870 x 992)
Empty weight	[kg]	208	302	2 x 302
Operating weight	[kg]	237	353	2 x 723
Diameter hydraulic connections	[Victaulic]	G 2"	G 2"	G 2"
SAFETY				
Maximum pressure of the refrigerant	[bar]	14	14	14
F-GAS license need for maintenance	[-]	NO	NO	NO

(*) Data shown are from free-field measurements.

(**) The indicated height does not take into account the anti-vibration mounts, which would increase the total height by between 60 mm and 110 mm.

N.B. Air-water heat pumps only operate if the outside air temperature is 5°C or higher.